


example

For large brass sheets (decks) use flexible mammoth glue. Brass can be glued directly to the rough surface of the 3D print parts. Etched the overlapped parts with an insulator, before painting to BodyFill360.

For better insertion of the etched piece, use a hot solder.



We recommend using a filler (BodyFill 360) that covers the print lines on the product. You can then sand the surface with sandpaper for a smooth surface. If the product is designed for a functional model in water, all surfaces of the product must be colored by the filler. (at least 4 layers of color). After using the bodyfill, grind the surface and stick etched parts.

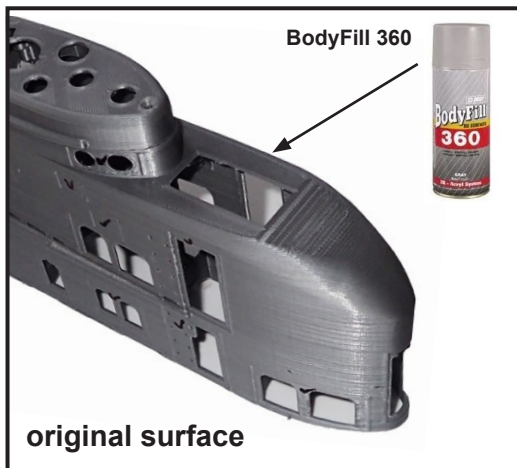

original surface



small etched parts stick super glue

**Do not expose to direct sunlight.**

The printing material is PLA. This is the same material as the RC models of aircraft. yet it is not recommended to leave it in the sun.

